

SERAGE

SR-2009P / SR-2016P

9 / 16 Channel Digital Video Recorders

Works with 3G





Main Features

- Powerful 480fps Recording Performance - CIF (360x240) Base
- MAX 4 HDD Built In (can support up to 8TB)/ SATA Type HDD Support
- Each Camera Resolution (720x480, 720x240, 360x240), Image Quality and Frame rate can be controlled
- User friendly Control by USB Mouse, Remote controller and Keyboard
- Maximised Security Efficiency by Live Image Edition, Digital Zoom (2x) and 2 Spot Monitor
- Optimal Recording Mode with Event, Enforcement and Schedule Recording
- Various Search Engine like Time, Calender and Event
- Multifarious Backup Devices: USB 2.0, DVR-RW and others (CD/DVD-RW, Memory Stick, Network Backup and USB HD)
- Self Diagnosis and Notification of System Status with S.M.A.R.T Interface
- Multi Language available (English, Japanese, Chinese, French, Spanish, Portugese, Danish, Italian, Turkish, Polish Russian, Taiwanese and Korean)
- trenghen Security Management by 9 Levels
- Fastest 10/100 Base-T Networking
- Various Network S/W Support for REMOTE, CMS, AGENT, PDA, WEB and 3G Phone
- Simultaneous Monitoring on 64 CH, Max. 128CH Watching by Dual Monitor, e-Map, Alarm & Event by CMS
- Great Storage Backup (Up to 16TB) through NAS (Network Attached Storage)

Art of Premium DVR

SR-2009P / SR-2016P


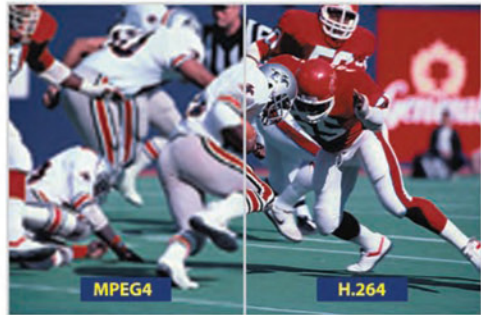
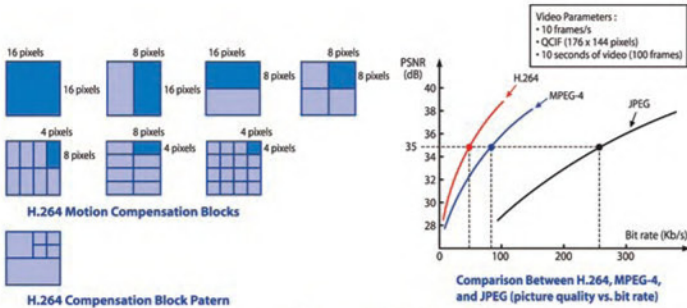


*The graph shows just one example of comparing bit rates at which JPEG, MPEG-4, and H.264 images can be transmitted. Actual bit rates for transmitting data using these three compression formats differ with image quality and image size settings.

Specifications

ITEMS		SR-2009P	SR-2016P
Camera Input / Loop Out		9/9	16/16
Camera Output		1CH Composite, S-video	
VGA Output		1CH	
Spot Out		2CH	
Compression		H.264	
Audio In / Out		4in / 1out(Compression : G. 723)	
Record	Speed	NTSC	480fps
		PAL	400fps
Playback	Speed	NTSC	480fps
		PAL	400fps
OS		Embedded Linux	
Pentaplex		Live, Recording, Playback, Networking, Backup at the same time	
Network	Interface	10/100 BaseT(1EA)	
	Protocol	TCP/IP(DHCP, Static IP), PPPoE	
	Program	REMOTE, CMS, AGENT, PDA, WEB	
	Speed	MAX. 480fps	
Backup	Device	USB 2.0, DVD-RW, Memory Stick, Network Backup	
	File	AVI, Independent Format	
HDD		MAX. 4EA HDD / Record up to 8TB	
Pan/Tilt, System Keyboard		RS-485	
Sensor (In/Out)		8/4	16/4
Control		Front Buttons, Jog Shuttle, IR Remote Controller and Mouse	
OSD		GUI, Multi Language	
Dimension		434(W) x 407.3(D) x 87(H) mm	
Operation Temperature		0~45°C	
Operation Humidity		5~85%	
Weight		7kg(Without DVD-RW, HDD)	
Power		A/C 115/230VAC, 60/50Hz	

Dimensions

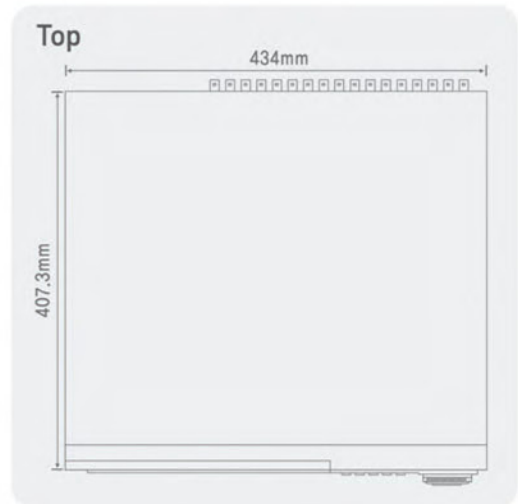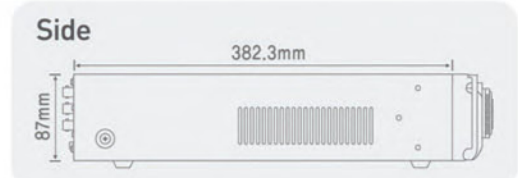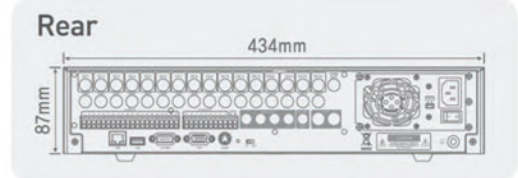

SERAGE